


# Metrolight LitoDrive™ 150 Programmable LED Driver

## 150W Single Isolated Output

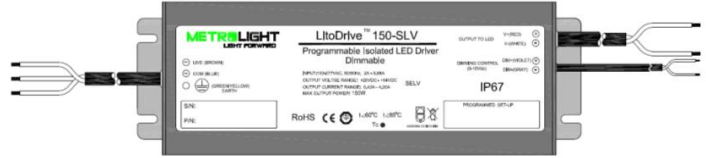

### Overview

Metrolight LED driver technology offers highly efficient, proven and programmable solution that drives and controls LEDs at a competitive price.

The driver offers complete adaptability to the LED design and user's needs.

Once selecting the required output current (which can be re-programmed at any time) the driver automatically applies the adequate current and voltage to the LEDs.

Any LED design change which may be required in the future, involves mere programming of the LED driver to the newly required current.

The LED driver incorporates unique control capabilities including: 0-10V/0-5V/PWM analog dimming, and on-board dimming profile.

The LED driver is approved by UL and TUV including CB report.








### Benefits

- Universal AC input Full range (95Vac up to 305Vac)
- Reprogramming of output current at any time.
- Isolated Driver suitable for Class II applications.
- Self-adapting Output Voltage, with large range of output voltages to match different LED loads
- High power factor, Low harmonic current
- High Efficiency (up to 92%)
- Protections: Short circuit, Over Current, Over Voltage, Over Temperature
- 4 in 1 dimming function control (0-10Vdc / 0-5Vdc, PWM signal, resistance, auto profile dimming)
- Programmable set-up via PC or via Infrared Remote control
- Up to 5 levels of programmable auto profile dimming
- IP67 design for indoor or outdoor installations
- Suitable for LED lighting and street lighting applications
- 5 years warranty
- Low Cost
- CB approved
- RoHS

LitoDrive -150-SLV-XXXX-YY	150 is the maximum output power; XXXX defines the initial output current (e.g.0420 =0.42A, 4200 =4.2A), YY defines the country (EU= Europe, US= USA).
LitoDrive -150-LV-XXXX-YY	150 is the maximum output power; XXXX defines the initial output current (e.g.0180 =0.18A, 1800 =1.8A), YY defines the country (EU= Europe, US= USA).
LitoDrive -150-MV-XXXX-YY	150 is the maximum output power; XXXX defines the initial output current (e.g.0180 =0.18A, 0900 =0.9A), YY defines the country (EU= Europe, US= USA).
LitoDrive -150-HV-XXXX-YY	150 is the maximum output power; XXXX defines the initial output current (e.g.0100 =0.1A, 0500 =0.5A), YY defines the country (EU= Europe, US= USA).

## Operating Specifications

Model		LitoDrive™ 150-SLV	LitoDrive™ 150-LV	LitoDrive™ 150-MV	LitoDrive™ 150-HV
OUTPUT	Output Current Range	0.42A-4.2A	0.18-1.8A	0.18-0.9A	0.1-0.5A
	Output Voltage	20~54Vdc	60~120Vdc	120~270Vdc	200~420Vdc
	Rated Power	150W	150W	150W	150W
	Ripple Current (max.)	200mA	180mA	150mA	100mA
	Output current regulation •	±3%	±3%	±3%	±3%
	Turn-on Rise time	300mSmax. @ Full load			
INPUT	Voltage range	90V~305VAC	90V~305VAC	90V~305VAC	90V~305VAC
	Frequency Range	47Hz~63Hz	47Hz~63Hz	47Hz~63Hz	47Hz~63Hz
	Power Factor(Typ.)	PF>0.99 at 115VAC	PF>0.99 at 115VAC	PF>0.99 at 115VAC	PF>0.99 at 115VAC
	Efficiency (Typ.)	92%	92%	92%	93%
	AC Current	1.7A@100Vac , 0.6A@277Vac & Full Load			
	Inrush Current	25A max @ 230Vac input	25A max @ 230Vac input	25A max @ 230Vac input	25A max @ 230Vac input
PROTECTION	Over Voltage	<60Vdc	<120Vdc	<270Vdc	<420Vdc
	Short Circuit	When output voltage is over the limitation, the product will shut down. Recovery when the fault condition is removed.			
	Over Temperature	The input power decrease when the output rail is shorted. No damage to the Driver. Recovery when the fault condition is removed.			
ENVIRONMENT	Operating Temp.	-40~60°C	-40~60°C	-40~60°C	-40~60°C
	Operating Humidity	95% RH	95% RH	95% RH	95% RH
	Storage Temp	-40~85°C	-40~85°C	-40~85°C	-40~85°C
	Water proof	IP67	IP67	IP67	IP67
	Vibration	When Tc > 90°C, the output current may decreases to protect the LED driver. When temperature case reduced to below 85°C, the current returned to the full set-up value. The minimum output current will be limited to 30% (typ.) of the rated output current in OTP function. The LED driver could survive in 125°C, for 2hrs.			
RELIABILITY	MTBF	>200Khours @ 25°C			
	Lifetime	The life time shall be at least 10 years at 40°C (typ. 12hours per day) at full load and nominal input condition.			
SAFETY & EMC	Safety Standards	UL8750, EN61347-1/A2:2013, EN61347-2-13: 2006, IEC61347-1, IEC61347-2-13, EN62493• F2010• C GB19510.1-2009, GB19510.14-2009,			
	Withstand Voltages	I/P-O/P: 3750VAC I/P-FG: 1650VAC O/P-FG: 500VAC			
	Isolation Resistance	50MΩ min. at primary to secondary with 500Vdc test voltage			
	EMC Emission	Compliance to EN55015 (CISPR15), EN61000-3-2; EN61000-3-3, GB17743, GB17625.1			
	EMC Immunity	Compliance to EN61547; EN55042, EN61000-4-2,3,4,5,6,8,11, GB/T18595, GB17626			
MECHANICAL	Dimensions	207*68*39mm, 8.14*2.67*1.53 Inch.			
	Weight	1100± ±50g			
	Color	BLACK	BLACK	BLACK	BLACK
	Packaging	10pcs/11Kg	10pcs/11Kg	10pcs/11Kg	10pcs/11Kg
OTHERS	/	/	/	/	/
NOTE	1. Ripple current measured at full bandwidth.				
	2. Since EMC performance depends on the installation, manufacturers must re-qualify EMC on the complete installation				

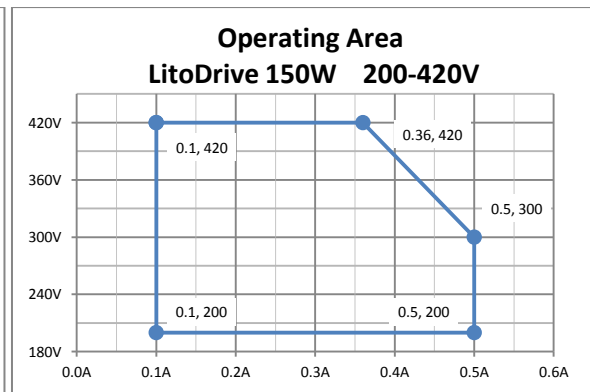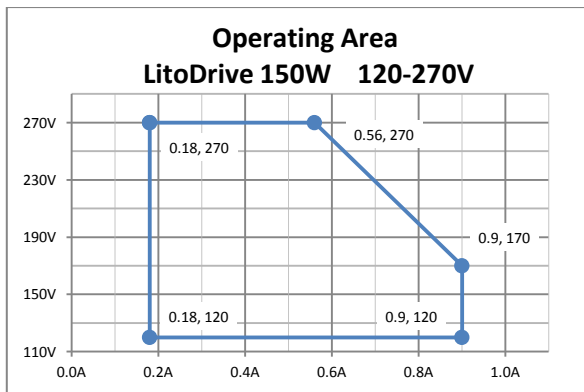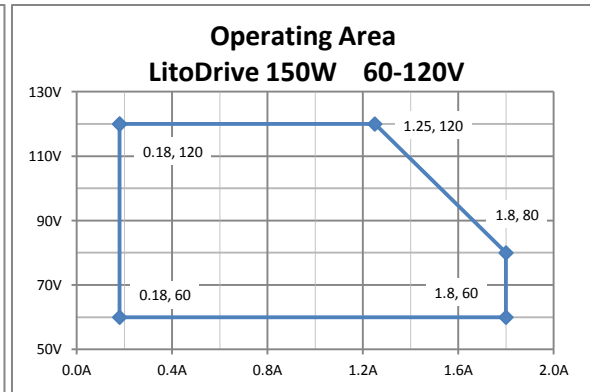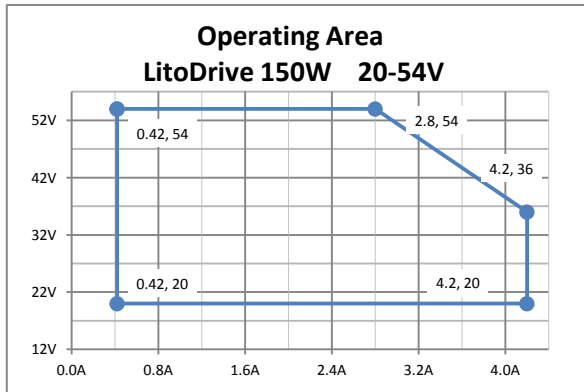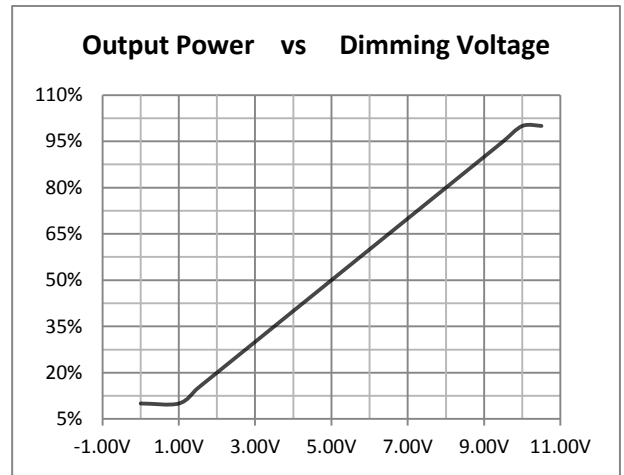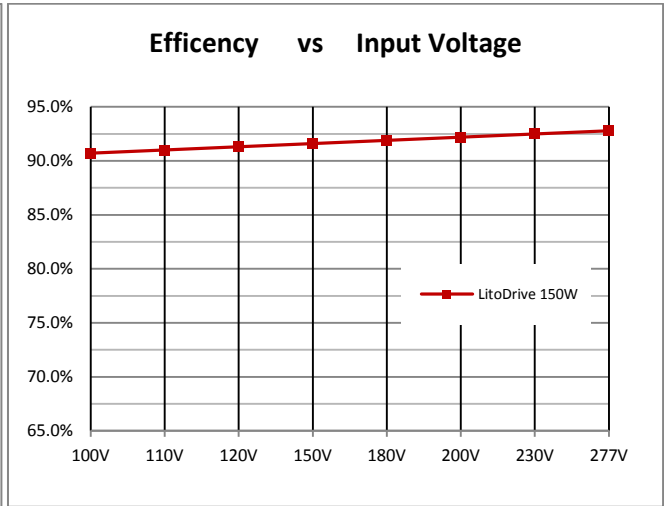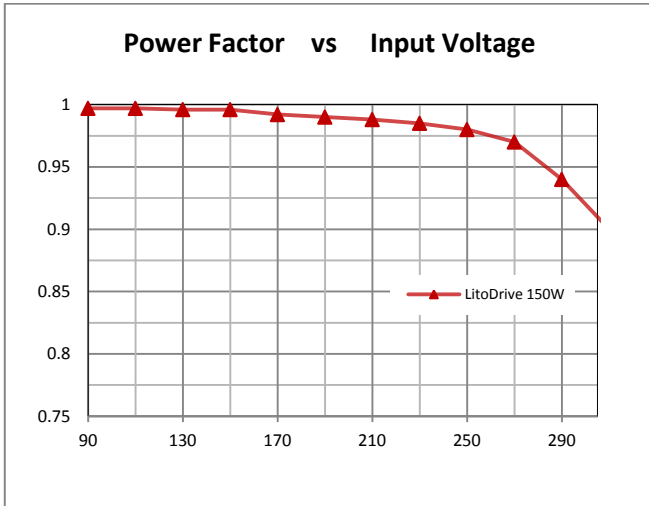

**Mechanical Dimensions**

